


Viking Power 16

Compact shower drain, bilge and waste water pump

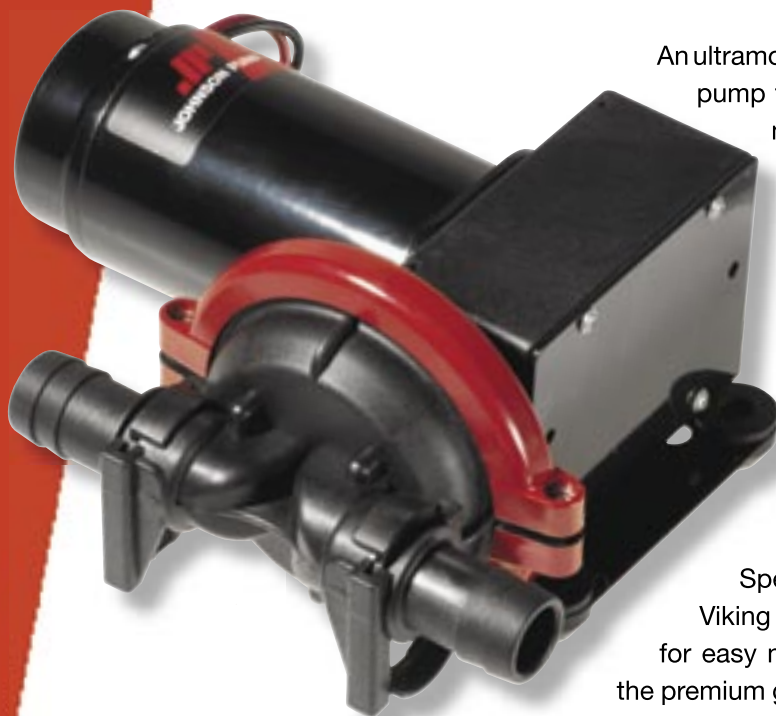

An ultramodern, single-chamber, self-priming diaphragm pump that can be set up in several different pump/motor configurations. It is easy to install anywhere after the drain outlet in the wastewater system or as a bilge pump in any leisure craft — new or used.

Its non-choke valves mean that no in-line filters are necessary, and the pump can not only be run dry, it can also handle a mixture of air and water without difficulty. The Viking Power 16 is self-priming up to a height of 3 meters.

With its low pulse and muffled rubber bracket, this pump offers quiet operation.

Specifically designed to pump wastewater, the Viking Power 16 has been built to last, and engineered for easy maintenance. When it comes time to replace the premium grade reinforced nitrile rubber diaphragm, you can put in a spare without even removing the pump from the system. Delivered with 1" hose and 3/4" hose 1/2" BSP Klick-Tite™ XL connectors.

Features

- Specifically designed to pump wastewater
- Easy to install, even in tight spaces
- Quiet operation
- Easy, low-cost maintenance
- High-impact glass-fiber reinforced nylon body
- Ball-bearing supported transmission
- Non-choke valves – no filters required
- Self-priming up to 3 meters (9.8 feet)
- Can be run dry and can pump air/water mixture
- Robust single diaphragm
- KlickTite™ XL connectors standard
- 12V or 24V motors
- Low power consumption
- Complies with ISO 15083 small craft bilge pump standard for vessels up to 12 m (39.4 ft).

Shower drain, bilge and waste water

Perfect for installation in tight spaces, the Viking Power 16 shower drain pump can be incorporated into a small boat wastewater system in several different pump/motor configurations. Compact, robust and adaptable, this pump can be mounted virtually anywhere on board. The Viking Power 16 has KlickTite™ connectors fitted as standard, literally making hose connections a snap!



Technical specifications:

Capacity:	16 liters/min (4.5 GPM) open flow (15 L/min at 0.1 bar)
Max. head:	3 meters (9.8 feet)
Max. lift:	3 meters (9.8 feet)
Max. head & lift:	4 meters (13.1 feet)
Dimensions:	186 mm long x 235/181 mm wide x 118/204 mm high
Connection:	KlickTite™ XL connectors for 1" hose or ¾" hose and ½" BSP threads; straight 90° available as extra accessory
Weight:	2.6 kg (5.7 pounds)
Motor:	40 W at 1 m head, 12/24V DC (with built-in thermal protection)
Body:	Nylon, glass-fiber reinforced
Valves:	Nitrile rubber
Diaphragm:	Reinforced nitrile rubber
Order No.	
10-13350-03	Viking Power 16 12 V
10-13350-04	Viking Power 16 24 V



Johnson Pump Marine Nastagatan 19, P.O. Box 1436, SE-701 14 Orebro, Sweden, Phone 46 19 27 23 72
Johnson Pumps of America, Inc. 10509 United Parkway, Schiller Park, Illinois 60176, USA, Phone 847-671-7867, Fax 847-671-7909
Johnson Pump (Australia) Pty. Ltd. P.O. Box 427, Cannon Hill, QLD. 4170, Australia, Phone 617 3899 9933, Fax 61 7 3899 8574
www.johnson-pump.com

